

Сенсорная панель оператора HMI Future F2156E2-PX

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70


Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: kof@nt-rt.ru || сайт: <https://kinco.nt-rt.ru/>

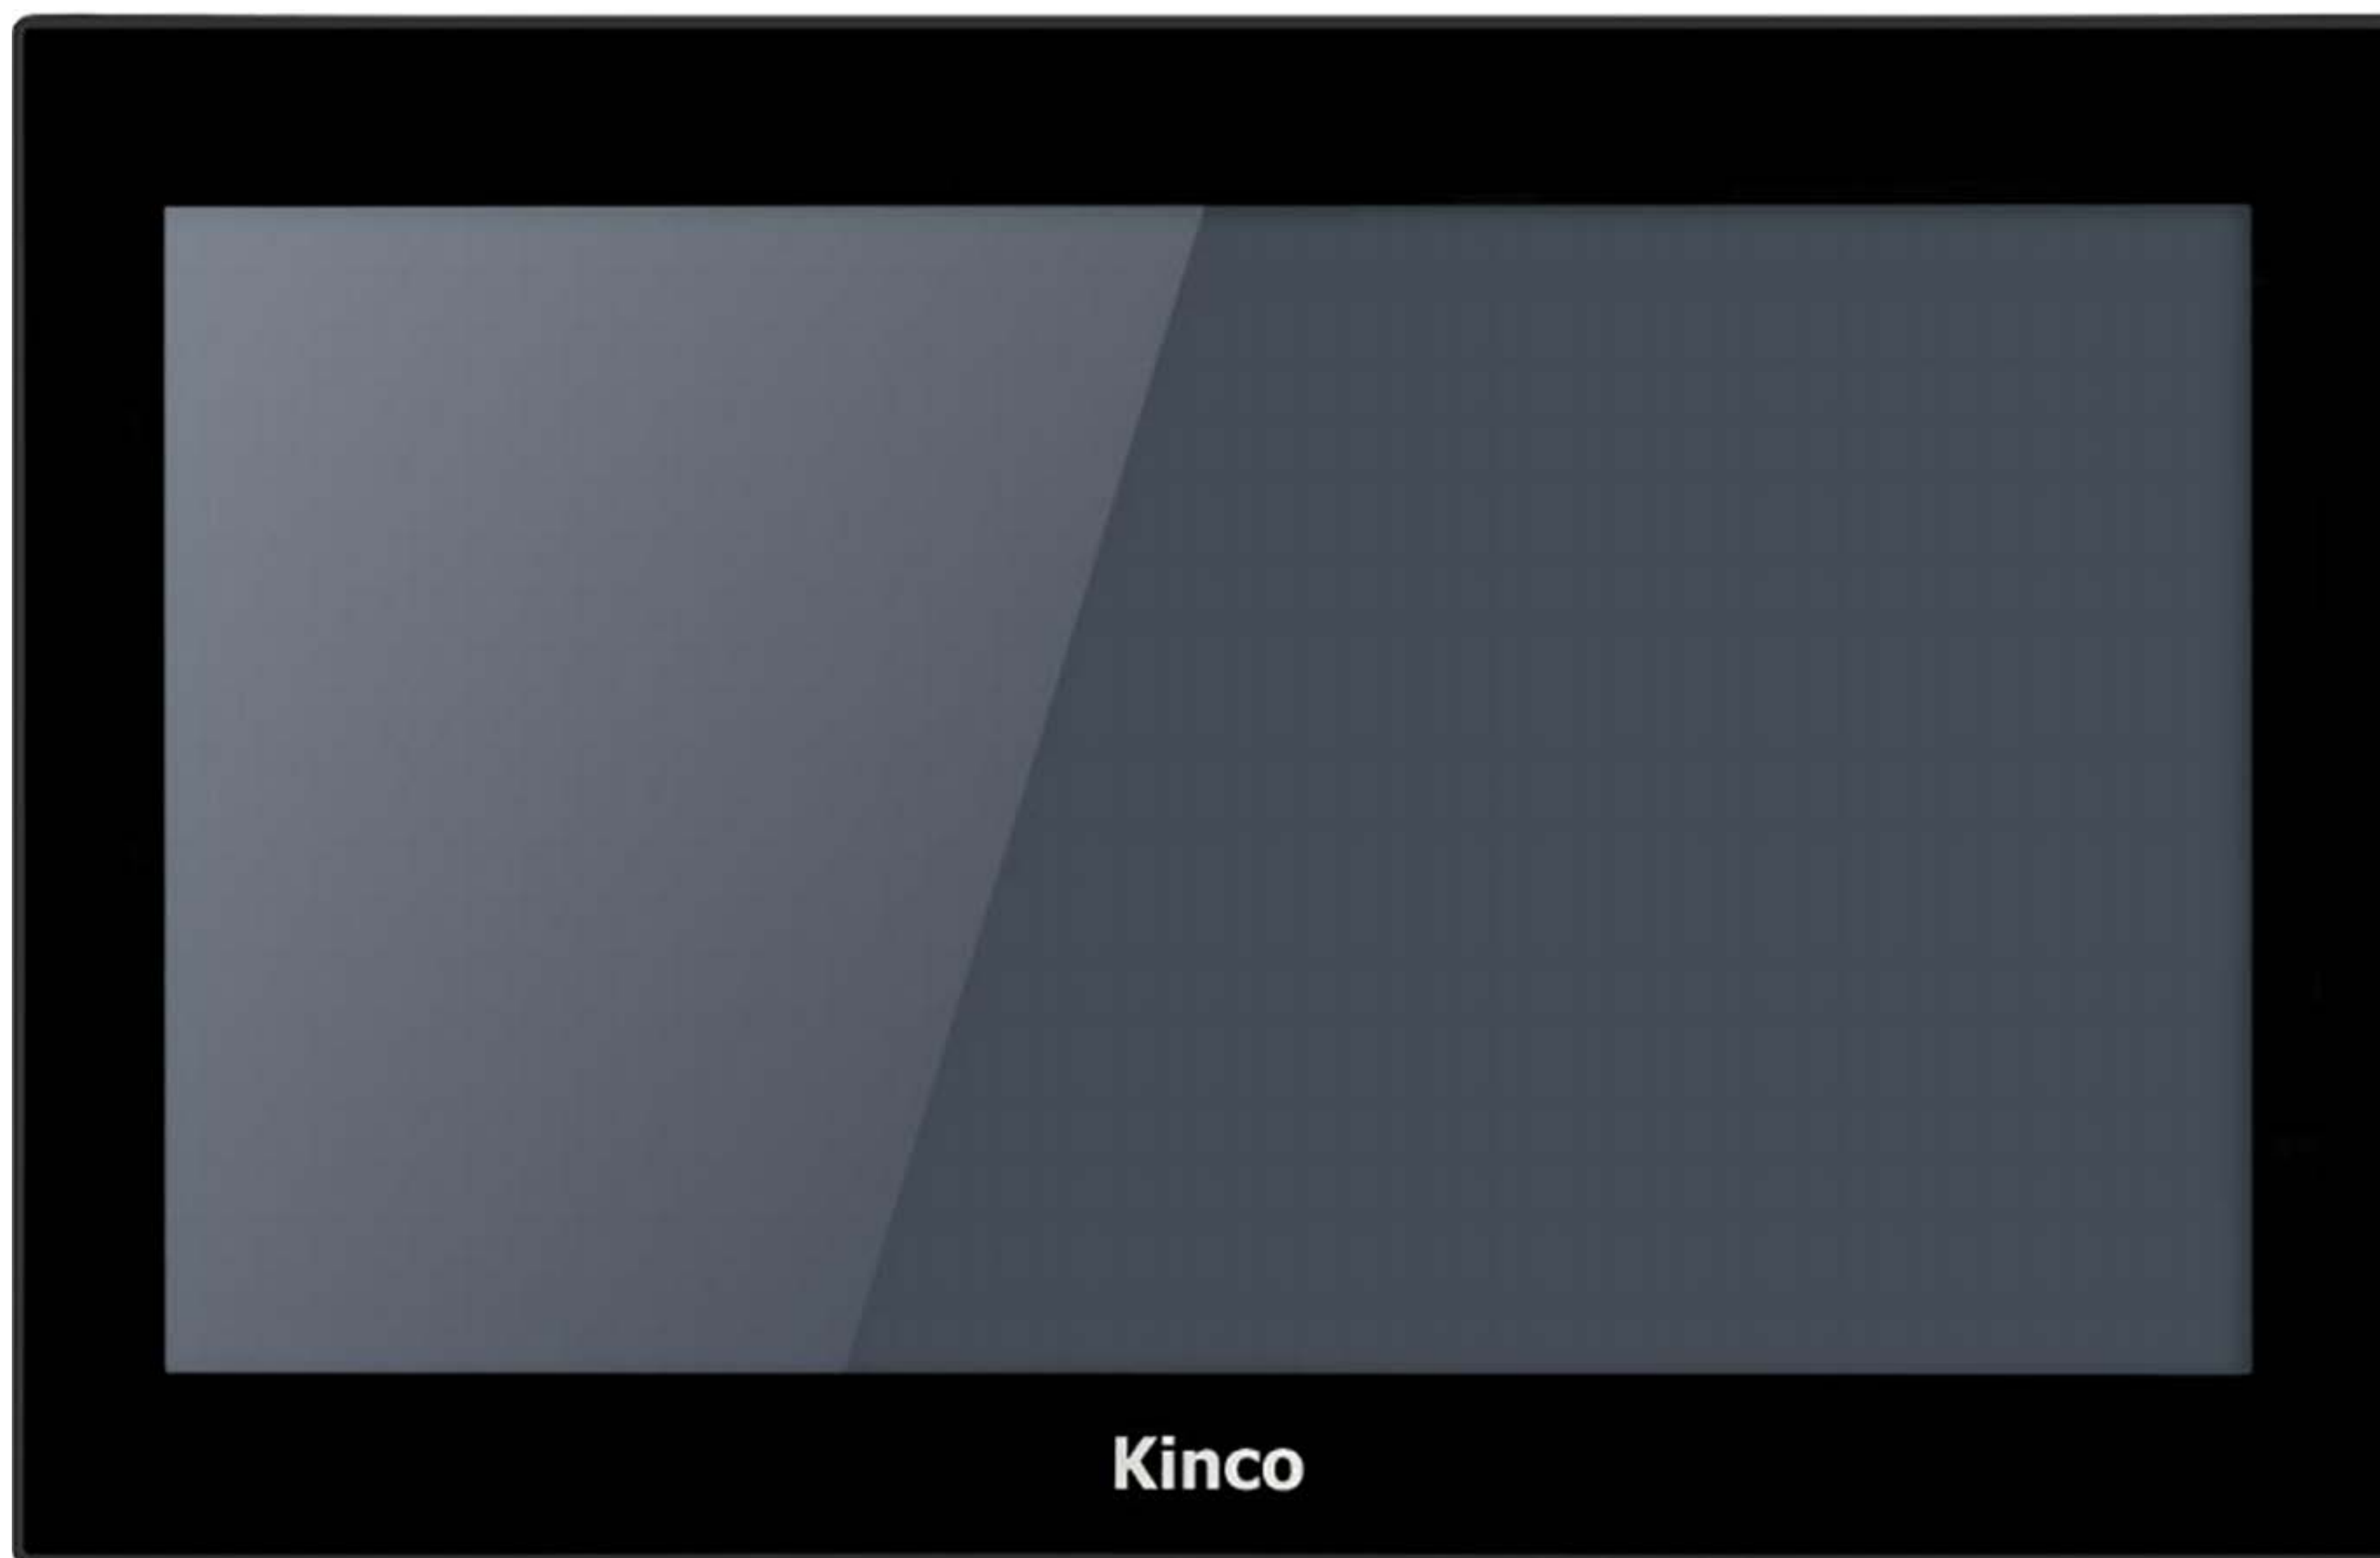

FUTURE Series 2nd Gen. industrial HMI F2156E2-PX

Product features

- 15.6" capacitive , 2K display, 16 million true colors
- Dual Ethernet ports and dual serial ports design, flexible communication
- Quad-core CPU + 1GB RAM + 8GB flash storage, ultimate performance
- Metal casing + PCB protection + power isolation, safe and reliable
- Based on the new Gen. Kinco DToolsPro software

Kinco new generation configuration software : [Kinco DToolsPro](#)

Office-style interface with a fresh and modern look


Tag variable configuration mode that is closer to ST language programming habits

Template configuration for a more efficient development experience




Designed for high-level equipment industry

FUTURE Series
2nd Gen. Industrial HMI
F2156E2-PX

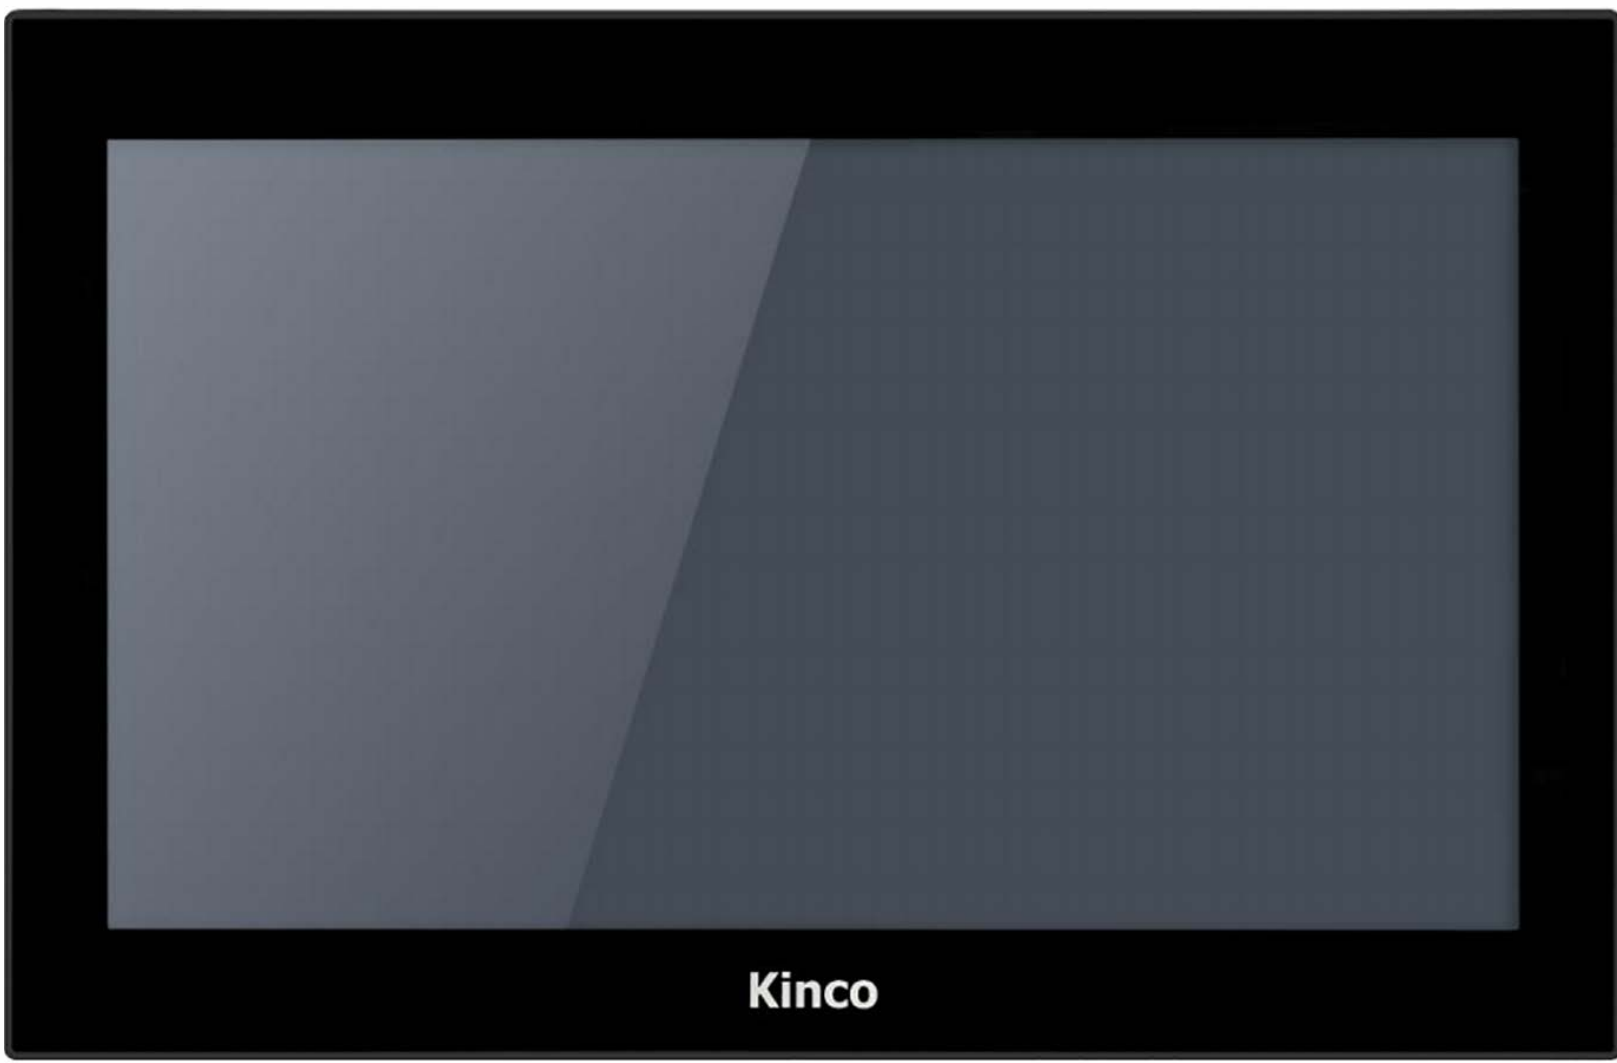

Model	F2156E2-PX
Performance specifications	
Display size	15.6" TFT
Display area	344.16(W)x193.59(H)
Resolution	1920*1080 pixel
Display color	16.2M
Display viewing angle	89/89/89/89(left/right/up/down)
Contrast ratio	1000:1
Backlight	LED
Brightness	300cd/m²
Backlight life	>30000 hours
Touch panel	Tempered glass capacitive touch panel
CPU	Quad-core ARM 1.8GHz
Memory	8GB NAND Flash Memory+1GB RAM
RTC	Built-in
Extensible memory	1 USB Host
Print port	USB Host/serial port
Ethernet	LAN0:10/100/1000 Mbps LAN1:10/100 Mbps
Program download	Ethernet port/USB Slave/U disk
Com port	COM0:RS232/RS485/RS422;COM2:RS232
Electrical specifications	
Input power supply	DC18V~DC28V,built-in isolated power supply
Rated power	15W@DC24V
Insulation resistance	Over 50MΩ@500V DC
Pressure resisitance test	500 VAC 1 minute
Structure specifications	
PCB	Built-in
Shell material	Metal
Overall dimension	395x259x25.5mm
Cut-out dimension	381.5x245.5mm
Installation mode	Installation of Fasteners and VESA Mounting(VESA100 *100mm)
Weight (kg)	2.5KG
Environmental specifications	
Working temperature	0~50℃
Working Humidity	10~90%RH (Non-condensing)
Storage temperature	-20~60℃
Storage humidity	10~90%RH (Non-condensing)
Seismic resistance	10~500Hz,30m/s²,X,Y,Z direction/hour
Cooling mode	Natural air cooling
Product certification	
Panel protection grade	IP65 certification(4208—93)
CE authentication	EN61000-6-4:2019, EN61000-6-2:2019)
Software	
Configuration software	Kinco DToolsPro

Dimensional diagram (Unit: mm)

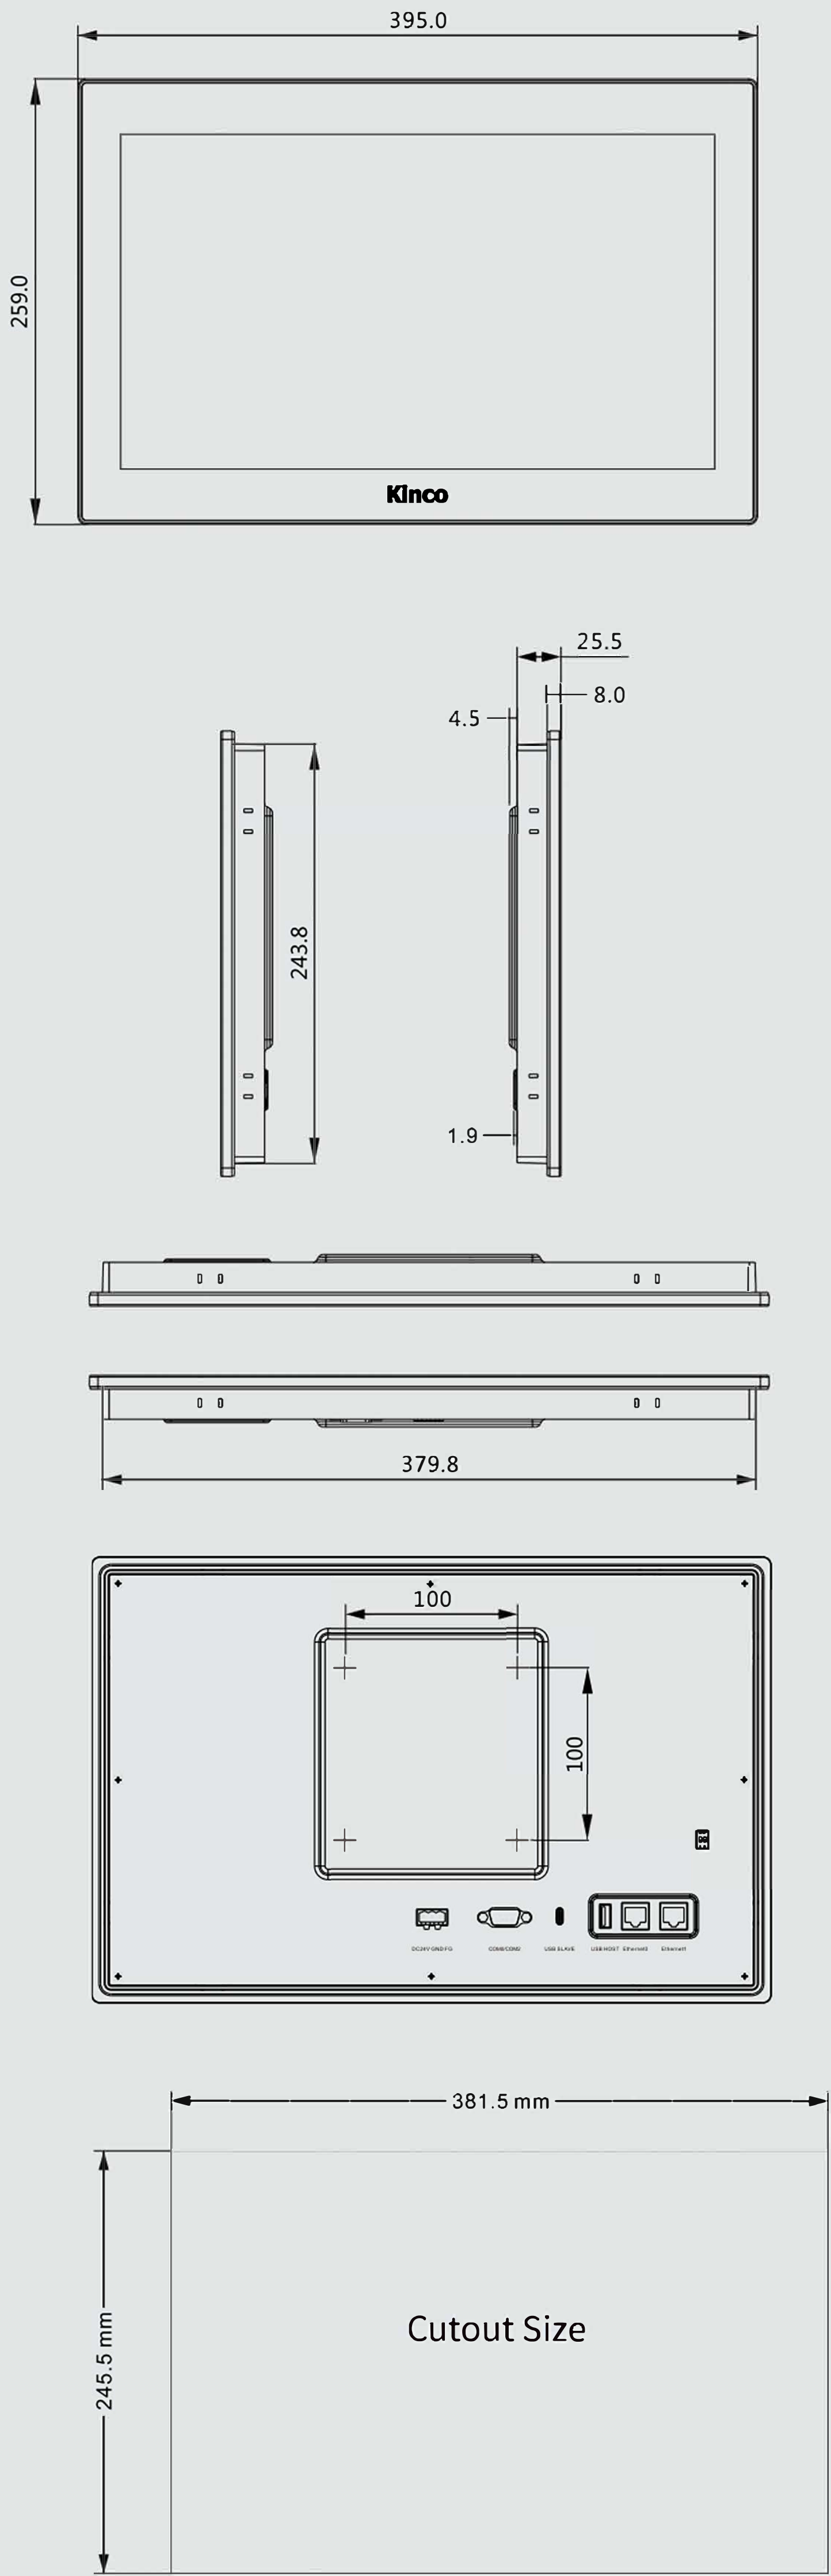



По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: kof@nt-rt.ru || сайт: <https://kinco.nt-rt.ru/>